



# MUNICIPALITY OF CLANWILLIAM-ERICKSON CONTRACTOR STREET REPAIR TENDERING DOCUMENTS

## REQUEST FOR QUOTATIONS

Applications are now being accepted for street repairs to Third Ave South, in Erickson, MB.


### Total Area:

205.0 ft x 25 ft

From the sidewalk at the intersection of Main Street and 3<sup>rd</sup> Ave S, travelling south approximately 205 feet in distance and 25 feet width. Sidewalk to remain intact.

### Specified Repairs:

- Excavate up to 24" of asphalt road surface and haul away
- Supply and place geotextile
- Load, haul and place 18" of municipality-supplied material with compaction every 6"
- Supply and place 6" of crushed gravel
- Shape and compact road to build a 3% crown

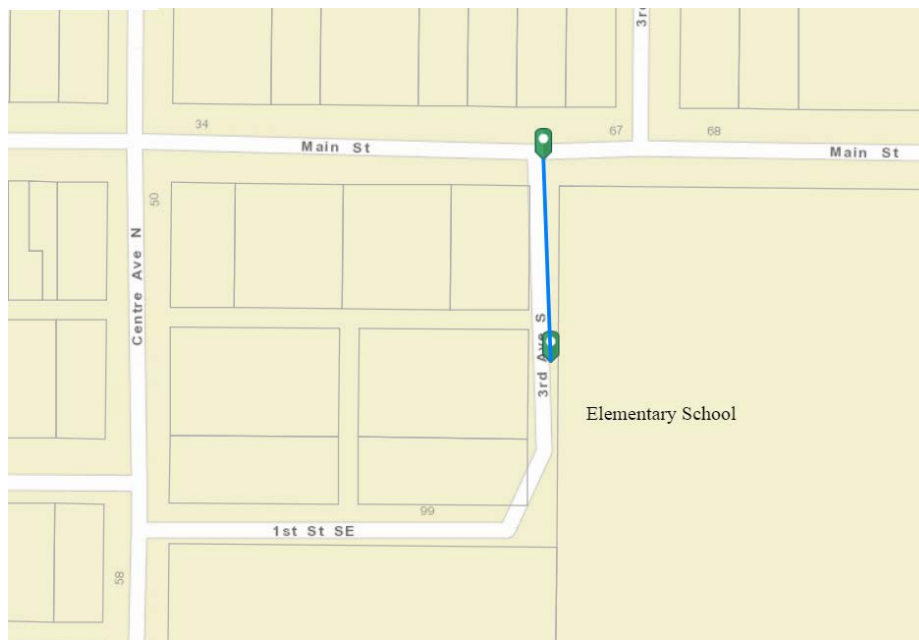



**MUNICIPALITY OF CLANWILLIAM-ERICKSON  
CONTRACTOR STREET REPAIR TENDERING DOCUMENTS**

**Criteria for repair:**

- ~ Work to be completed between June 24 and July 31, 2019
- ~ Once the job has commenced, it must be continuous until completion except in inappropriate weather
- ~ The contractor will be responsible for obtaining necessary utility locates
- ~ Separate excavated material where possible
- ~ Tipping fees waived if waste hauled to Erickson Waste Disposal Grounds

**Bids marked “Street Repairs” shall be received by the undersigned until June 11<sup>th</sup>, 2019 at  
4:30 p.m.**

Municipality of Clanwilliam-Erickson  
45 Main Street, P.O. Box 40  
Erickson, Manitoba R0J 0P0  
Phone: 204-636-2431  
Fax: 204-636-2516  
E-mail: [cao@ericksonmb.ca](mailto:cao@ericksonmb.ca)

**Council reserves the right to accept or reject any or all tenders or other offers as it may  
deem to be in its best interest.**



## **MUNICIPALITY OF CLANWILLIAM-ERICKSON CONTRACTOR STREET REPAIR TENDERING DOCUMENTS**

### **CONTRACTOR RESPONSIBILITIES**

- 1.1 Must carry all perils comprehensive public liability insurance at a minimum of \$1,000,000.
- 1.2 Must carry appropriate Worker's Compensation coverage.
- 1.3 Will assume the responsibility for the safety of the jobsite and ensure all workers or the public are protected from hazards.
- 1.4 Will not operate any equipment or machinery in such a way that creates a noise nuisance before 7:00 am or after 11:00 pm. A violation of this clause shall result in a penalty of \$200 for each day a violation occurs and will be deducted from the final payment.
- 1.5 Once the job has commenced, it must be continuous until completion except in inappropriate weather conditions.
- 1.6 Must complete the job to the date specified in the tender. Should the job be completed after the specified deadline, a penalty of \$200 per day will be assessed and deducted from the final payment.
- 1.7 The assessment of charged days will be stopped the day after the street under construction is open to vehicular traffic and all deficiencies have been addressed.
- 1.8 Of the excavated material, the asphalt will be separated from base material.

### **MUNICIPAL RESPONSIBILITIES**

- 1.9 Will exercise a 10% hold back upon receiving an invoice from the contractor.
- 1.10 Upon satisfactory completion of the project, the 10% hold back will be issued in full to the contractor, except for an instance as specified in clause 1.6, the remaining hold back sum may be less.